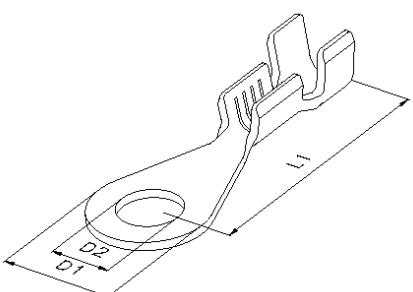
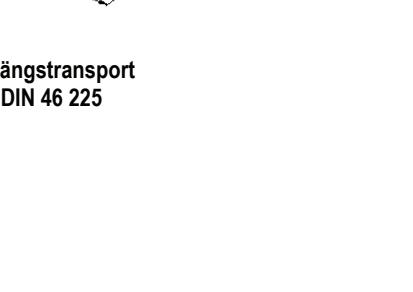


HS United European Connectors

Ringkabelschuh	Artikel-Nr.	Leiter-quer-schnitt mm ²	Material	Ober-fläche	L1 mm	D1 mm	D2 mm	Matеrial-stärke mm	Verp.-Ein-heit
 <p>Längstransport * DIN 46 225</p>	23.210.110	0,5 – 1,0	CuZn	blank	18,3	8	3,2*	0,6	6.000
	23.210.120		CuZn	Sn					
	23.210.310		CuSn	blank					
	23.210.320		CuSn	Sn					
	23.810.110	0,5 – 1,0	CuZn	blank	18,3	8	3,8	0,6	6.000
	23.810.120		CuZn	Sn					
	23.810.310		CuSn	blank					
	23.810.320		CuSn	Sn					
	24.310.110	0,5 – 1,0	CuZn	blank	18,3	8	4,3*	0,6	6.000
	24.310.120		CuZn	Sn					
	24.310.310		CuSn	blank					
	24.310.320		CuSn	Sn					
	25.210.110	0,5 – 1,0	CuZn	blank	18,3	8	5,2	0,6	6.000
	25.210.120		CuZn	Sn					
	25.210.310		CuSn	blank					
	25.210.320		CuSn	Sn					