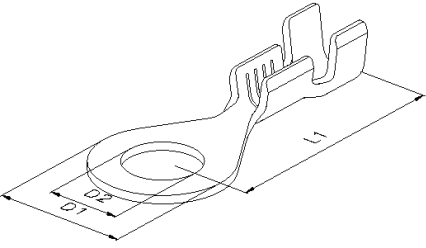


HS United European Connectors

| Ringkabelschuh | Artikel-Nr. | Leiter- quer- schnitt | Material | Ober- fläche | L1 | D1 | D2 | Mate- rial- stärke | Verp.- Ein- heit |
|--|-------------|-----------------------------|----------|-----------------|------|-----|------|--------------------------|------------------------|
| | | mm ² | | | mm | mm | mm | mm | |
|  <p>Längstransport * DIN 46 225</p> | 23.211.110 | 0,5 – 1,0 | CuZn | blank | 17,5 | 9,5 | 3,2 | 0,6 | 6.000 |
| | 23.211.120 | | CuZn | Sn | | | | | |
| | 23.211.310 | | CuSn | blank | | | | | |
| | 23.211.320 | | CuSn | Sn | | | | | |
| | 23.811.110 | 0,5 – 1,0 | CuZn | blank | 17,5 | 9,5 | 3,8 | 0,6 | 6.000 |
| | 23.811.120 | | CuZn | Sn | | | | | |
| | 23.811.310 | | CuSn | blank | | | | | |
| | 23.811.320 | | CuSn | Sn | | | | | |
| | 24.311.110 | 0,5 – 1,0 | CuZn | blank | 17,5 | 9,5 | 4,3 | 0,6 | 6.000 |
| | 24.311.120 | | CuZn | Sn | | | | | |
| | 24.311.310 | | CuSn | blank | | | | | |
| | 24.311.320 | | CuSn | Sn | | | | | |
| | 25.311.110 | 0,5 – 1,0 | CuZn | blank | 17,5 | 9,5 | 5,3* | 0,6 | 6.000 |
| | 25.311.120 | | CuZn | Sn | | | | | |
| | 25.311.310 | | CuSn | blank | | | | | |
| | 25.311.320 | | CuSn | Sn | | | | | |
| | 26.511.110 | 0,5 – 1,0 | CuZn | blank | 17,5 | 9,5 | 6,5 | 0,6 | 6.000 |
| | 26.511.120 | | CuZn | Sn | | | | | |
| | 26.511.310 | | CuSn | blank | | | | | |
| | 26.511.320 | | CuSn | Sn | | | | | |