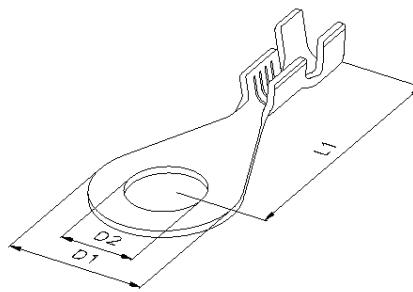
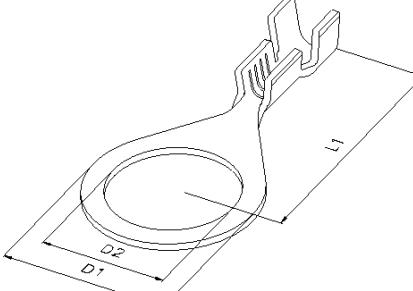


# HS United European Connectors

Ringkabelschuh	Artikel-Nr.	Leiter-quer-schnitt mm <sup>2</sup>	Material	Ober-fläche	L1 mm	D1 mm	D2 mm	Matеrial-stärke mm	Verp.-Ein-heit
 <p>Längstransport * DIN 46 225</p>	26.512.110	0,5 – 1,0	CuZn	blank	22	12	6,5*	0,6	4.000
	26.512.120		CuZn	Sn					
	26.512.310		CuSn	blank					
	26.512.320		CuSn	Sn					
	28.412.110	0,5 – 1,0	CuZn	blank	22	12	8,4	0,6	4.000
	28.412.120		CuZn	Sn					
	28.412.310		CuSn	blank					
	28.412.320		CuSn	Sn					
Ringkabelschuh	Artikel-Nr.	Leiter-quer-schnitt mm <sup>2</sup>	Material	Ober-fläche	L1 mm	D1 mm	D2 mm	Matеrial-stärke mm	Verp.-Ein-heit
 <p>Längstransport * DIN 46 225</p>	26.513.110	0,5 – 1,0	CuZn	blank	21	14	6,5	0,6	4.000
	26.513.120		CuZn	Sn					
	26.513.310		CuSn	blank					
	26.513.320		CuSn	Sn					
	28.413.110	0,5 – 1,0	CuZn	blank	21	14	8,4*	0,6	4.000
	28.413.120		CuZn	Sn					
	28.413.310		CuSn	blank					
	28.413.320		CuSn	Sn					
	29.513.110	0,5 – 1,0	CuZn	blank	21	14	10,5	0,6	4.000
	29.513.120		CuZn	Sn					
	29.513.310		CuSn	blank					
	29.513.320		CuSn	Sn					