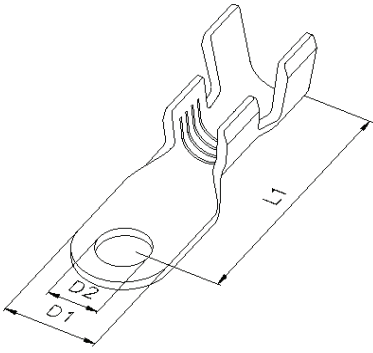
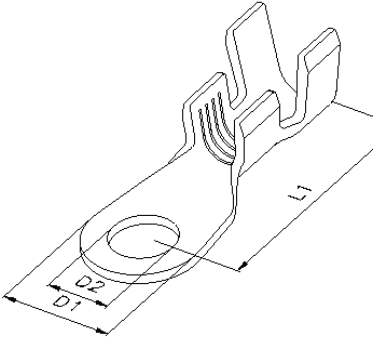


HS United European Connectors

Ringkabelschuh	Artikel-Nr.	Leiter- quer- schnitt	Material	Ober- fläche	L1	D1	D2	Mate- rial- stärke	Verp.- Ein- heit
		mm ²			mm	mm	mm	mm	
 <p>Längstransport * DIN 46 225</p>	24.359.110	2,5 – 6,0*	CuZn	blank	21,3	8	4,3	0,8	3.000
	24.359.120		CuZn	Sn					
	24.359.310		CuSn	blank					
	24.359.320		CuSn	Sn					
	24.356.110	4,0 - 6,0	CuZn	blank	21,3	8	4,3	0,8	3.000
	24.356.120		CuZn	Sn					
	24.356.310		CuSn	blank					
	24.356.320		CuSn	Sn					
 <p>Längstransport * DIN 46 225</p>	24.361.110	2,5 - 6,0	CuZn	blank	20,5	9,5	4,3	0,8	3.000
	24.361.120		CuZn	Sn					
	24.361.310		CuSn	blank					
	24.361.320		CuSn	Sn					
	24.358.110	4,0 – 6,0	CuZn	blank	20,5	9,5	4,3	0,8	3.000
	24.358.120		CuZn	Sn					
	24.358.310		CuSn	blank					
	24.358.320		CuSn	Sn					
	25.361.110	2,5 - 6,0*	CuZn	blank	20,5	9,5	5,3*	0,8	3.000
	25.361.120		CuZn	Sn					
	25.361.310		CuSn	blank					
	25.361.320		CuSn	Sn					
	25.358.110	4,0 - 6,0	CuZn	blank	20,5	9,5	5,3	0,8	3.000
	25.358.120		CuZn	Sn					
	25.358.310		CuSn	blank					
	25.358.320		CuSn	Sn					