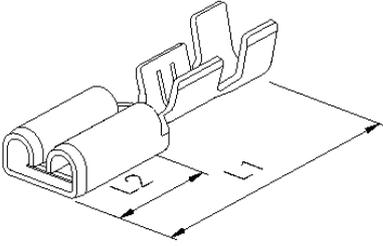


HS United European Connectors

| Flachsteckhülse 2,8 mm | Artikel-Nr. | Leiter- quer- schnitt | Material | Ober- fläche | Steck- dicke | L1 | L2 | Mate- rial- stärke | Verp.- Ein- heit |
|--|-------------|-----------------------------|----------|-----------------|-----------------|------|----|--------------------------|------------------------|
| | | mm ² | | | mm | mm | mm | mm | |
|  <p>Längstransport DIN 46 330</p> | 22.805.115 | 0,25 – 0,5 | CuZn | blank | 0,5 | 12,5 | 5 | 0,3 | 15.000 |
| | 22.805.125 | | CuZn | Sn | | | | | |
| | 22.805.315 | | CuSn | blank | | | | | |
| | 22.805.325 | | CuSn | Sn | | | | | |
| | 22.805.110 | 0,25 – 0,5 | CuZn | blank | 0,8 | 12,5 | 5 | 0,3 | 15.000 |
| | 22.805.120 | | CuZn | Sn | | | | | |
| | 22.805.310 | | CuSn | blank | | | | | |
| | 22.805.320 | | CuSn | Sn | | | | | |
| | 22.810.115 | 0,5 – 1,0 | CuZn | blank | 0,5 | 12,5 | 5 | 0,3 | 15.000 |
| | 22.810.125 | | CuZn | Sn | | | | | |
| | 22.810.315 | | CuSn | blank | | | | | |
| | 22.810.325 | | CuSn | Sn | | | | | |
| | 22.810.110 | 0,5 – 1,0 | CuZn | blank | 0,8 | 12,5 | 5 | 0,3 | 15.000 |
| | 22.810.120 | | CuZn | Sn | | | | | |
| | 22.810.310 | | CuSn | blank | | | | | |
| | 22.810.320 | | CuSn | Sn | | | | | |