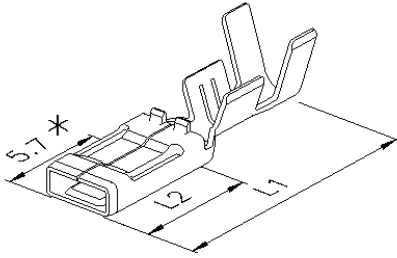


HS United European Connectors

Flachsteckhülse 2,8 mm leicht steckbar	Artikel-Nr.	Leiter- quer- schnitt	Material	Ober- fläche	Steck- dicke	L1	L2	Mate- rial- stärke	Verp.- Ein- heit
		mm ²			mm	mm	mm	mm	
 <p>Längstransport * = Abstand Rastpunkt</p>	72.807.114	0,25 – 0,5	CuZn	blank	0,4	14	6,5	0,25	15.000
	72.807.124		CuZn	Sn					
	72.807.314		CuSn	blank					
	72.807.324		CuSn	Sn					
	72.807.115	0,25 – 0,5	CuZn	blank	0,5	14	6,5	0,25	15.000
	72.807.125		CuZn	Sn					
	72.807.315		CuSn	blank					
	72.807.325		CuSn	Sn					
	72.807.110	0,25 – 0,5	CuZn	blank	0,8	14	6,5	0,25	15.000
	72.807.120		CuZn	Sn					
	72.807.310		CuSn	blank					
	72.807.320		CuSn	Sn					
	72.817.114	0,5 – 1,0	CuZn	blank	0,4	14	6,5	0,25	15.000
	72.817.124		CuZn	Sn					
	72.817.314		CuSn	blank					
	72.817.324		CuSn	Sn					
	72.817.115	0,5 – 1,0	CuZn	blank	0,5	14	6,5	0,25	15.000
	72.817.125		CuZn	Sn					
	72.817.315		CuSn	blank					
	72.817.325		CuSn	Sn					
72.817.110	0,5 – 1,0	CuZn	blank	0,8	14	6,5	0,25	15.000	
72.817.120		CuZn	Sn						
72.817.310		CuSn	blank						
72.817.320		CuSn	Sn						