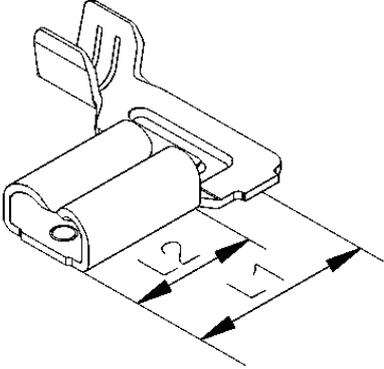
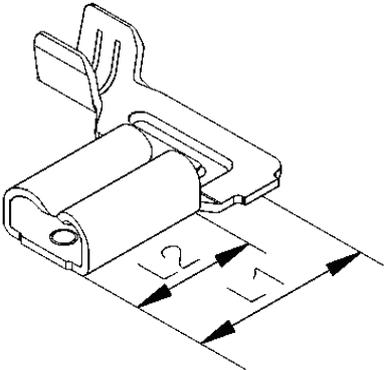


# HS United European Connectors

| <b>Winkelflachsteckhülse</b><br>2,8 mm<br>mit Rastpunkt<br>Boden mit Kontaktpunkten                       | Artikel-Nr.    | Leiter-<br>quer-<br>schnitt<br><br>mm <sup>2</sup> | Material | Ober-<br>fläche | Steck-<br>dicke<br><br>mm | L1<br><br>mm | L2<br><br>mm | Mate-<br>rial-<br>stärke<br><br>mm | Verp.-<br>Ein-<br>heit |
|---|----------------|--|----------|-----------------|---------------------------|--------------|--------------|------------------------------------|------------------------|
|  <p>Längstransport</p>   | 92.809.116.005 | 0,5 – 1,0  | CuZn     | blank           | 0,5                       | 7,85         | 5            | 0,3                                | 8.000                  |
|   | 92.809.126.005 |  | CuZn     | Sn              |                           |              |              |                                    |                        |
|   | 92.809.316.005 |  | CuSn     | blank           |                           |              |              |                                    |                        |
|   | 92.809.326.005 |  | CuSn     | Sn              |                           |              |              |                                    |                        |
|   | 92.809.116.008 | 0,5 – 1,0  | CuZn     | blank           | 0,8                       | 7,85         | 5            | 0,3                                | 8.000                  |
|   | 92.809.126.008 |  | CuZn     | Sn              |                           |              |              |                                    |                        |
|   | 92.809.316.008 |  | CuSn     | blank           |                           |              |              |                                    |                        |
|   | 92.809.326.008 |  | CuSn     | Sn              |                           |              |              |                                    |                        |
| <b>Winkelflachsteckhülse</b><br>2,8 mm<br>ohne Rastpunkt<br>Boden mit Kontaktpunkten                      | Artikel-Nr.    | Leiter-<br>quer-<br>schnitt<br><br>mm <sup>2</sup> | Material | Ober-<br>fläche | Steck-<br>dicke<br><br>mm | L1<br><br>mm | L2<br><br>mm | Mate-<br>rial-<br>stärke<br><br>mm | Verp.-<br>Ein-<br>heit |
|  <p>Längstransport</p> | 92.809.116.205 | 0,5 – 1,0  | CuZn     | blank           | 0,5                       | 7,85         | 5            | 0,3                                | 8.000                  |
|   | 92.809.126.205 |  | CuZn     | Sn              |                           |              |              |                                    |                        |
|   | 92.809.316.205 |  | CuSn     | blank           |                           |              |              |                                    |                        |
|   | 92.809.326.205 |  | CuSn     | Sn              |                           |              |              |                                    |                        |
|   | 92.809.116.208 | 0,5 – 1,0  | CuZn     | blank           | 0,8                       | 7,85         | 5            | 0,3                                | 8.000                  |
|   | 92.809.126.208 |  | CuZn     | Sn              |                           |              |              |                                    |                        |
|   | 92.809.316.208 |  | CuSn     | blank           |                           |              |              |                                    |                        |
|   | 92.809.326.208 |  | CuSn     | Sn              |                           |              |              |                                    |                        |