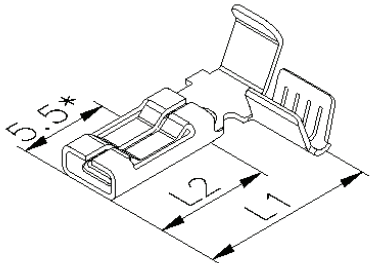
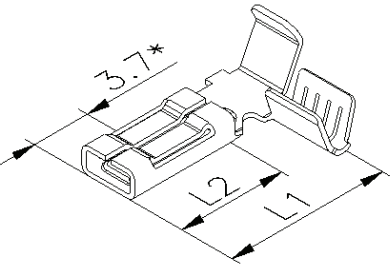


HS United European Connectors

Winkelflachsteckhülse 2,8 mm	Artikel-Nr.	Leiter- quer- schnitt	Material	Ober- fläche	Steck- dicke	L1	L2	Mate- rial- stärke	Verp.- Ein- heit
		mm ²			mm	mm	mm	mm	
 <p>Längstransport * = Abstand Rastpunkt</p>	92.810.116	0,5 – 1,0	CuZn	blank	0,5	10,25	7	0,3	8.000
	92.810.126		CuSn	Sn					
	92.810.316		CuZn	blank					
	92.810.326		CuSn	Sn					
	92.810.116.508	0,5 – 1,0	CuZn	blank	0,8	10,25	7	0,3	8.000
	92.810.126.508		CuSn	Sn					
	92.810.316.508		CuZn	blank					
	92.810.326.508		CuSn	Sn					
 <p>Längstransport * = Abstand Rastpunkt</p>	92.810.116.005	0,5 – 1,0	CuZn	blank	0,5	10,25	7	0,3	8.000
	92.810.126.005		CuZn	Sn					
	92.810.316.005		CuSn	blank					
	92.810.326.005		CuSn	Sn					
	92.810.116.008	0,5 – 1,0	CuZn	blank	0,8	10,25	7	0,3	8.000
	92.810.126.008		CuZn	Sn					
	92.810.316.008		CuSn	blank					
	92.810.326.008		CuSn	Sn					
	92.810.126.098		CuZn	gal.Sn					