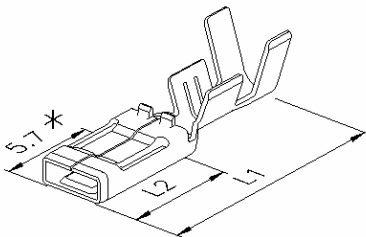
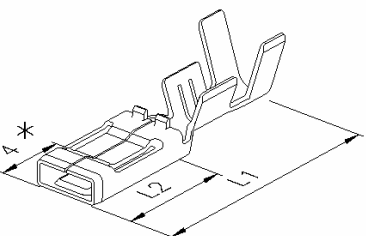


# HS United European Connectors

Flachsteckhülse 2,8 mm leicht steckbar		Artikel-Nr.	Leiter- quer- schnitt  mm <sup>2</sup>	Material	Ober- fläche	Steck- dicke  mm	L1  mm	L2  mm	Mate- rial- stärke  mm	Verp.- Ein- heit
 <p>Längstransport * = Abstand Rastpunkt</p>	72.817.114	0,5 – 1,0	CuZn	blank	0,4	14	6,5	0,25	15.000	
	72.817.124		CuZn	Sn						
	72.817.314		CuSn	blank						
	72.817.324		CuSn	Sn						
	72.817.115	0,5 – 1,0	CuZn	blank	0,5	14	6,5	0,25	15.000	
	72.817.125		CuZn	Sn						
	72.817.315		CuSn	blank						
	72.817.325		CuSn	Sn						
	72.817.110	0,5 – 1,0	CuZn	blank	0,8	14	6,5	0,25	15.000	
	72.817.120		CuZn	Sn						
	72.817.310		CuSn	blank						
	72.817.320		CuSn	Sn						
Flachsteckhülse 2,8 mm leicht steckbar		Artikel-Nr.	Leiter- quer- schnitt  mm <sup>2</sup>	Material	Ober- fläche	Steck- dicke  mm	L1  mm	L2  mm	Mate- rial- stärke  mm	Verp.- Ein- heit
 <p>Längstransport * = Abstand Rastpunkt</p>	72.818.114	0,5 – 1,0	CuZn	blank	0,4	14	6,5	0,25	15.000	
	72.818.124		CuZn	Sn						
	72.818.314		CuSn	blank						
	72.818.324		CuSn	Sn						
	72.818.115	0,5 – 1,0	CuZn	blank	0,5	14	6,5	0,25	15.000	
	72.818.125		CuZn	Sn						
	72.818.315		CuSn	blank						
	72.818.325		CuSn	Sn						
	72.818.110	0,5 – 1,0	CuZn	blank	0,8	14	6,5	0,25	15.000	
	72.818.120		CuZn	Sn						
	72.818.310		CuSn	blank						
	72.818.320		CuSn	Sn						