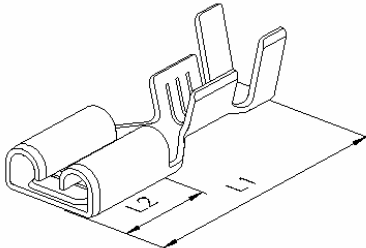
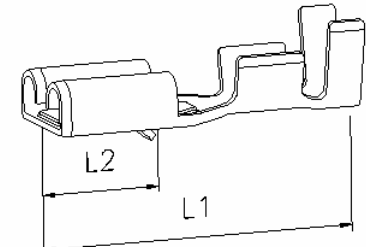


# HS United European Connectors

Flachsteckhülse 4,8 mm	Artikel-Nr.	Leiter- quer- schnitt	Material	Ober- fläche	Steck- dicke	L1	L2	Material- stärke	Verp.- Ein- heit
		mm <sup>2</sup>			mm	mm	mm	mm	
 <p>Längstransport DIN 46 247 Blatt 2</p>	24.810.115	0,5 – 1,0	CuZn	blank	0,5	16	6	0,35	12.000
	24.810.125		CuZn	Sn					
	24.810.315		CuSn	blank					
	24.810.325		CuSn	Sn					
	24.810.110	0,5 – 1,0	CuZn	blank	0,8	16	6	0,35	12.000
	24.810.120		CuZn	Sn					
	24.810.310		CuSn	blank					
	24.810.320		CuSn	Sn					
	24.825.115	1,0 – 2,5	CuZn	blank	0,5	16	6	0,35	10.000
	24.825.125		CuZn	Sn					
	24.825.315		CuSn	blank					
	24.825.325		CuSn	Sn					
	24.825.110	1,0 – 2,5	CuZn	blank	0,8	16	6	0,35	10.000
	24.825.120		CuZn	Sn					
	24.825.310		CuSn	blank					
	24.825.320		CuSn	Sn					
 <p>Längstransport</p>	24.810.111.005	0,5 – 1,0	CuZn	blank	0,5	16	6	0,35	10.000
	24.810.121.005		CuZn	Sn					
	24.810.311.005		CuSn	blank					
	24.810.321.005		CuSn	Sn					
	24.810.111	0,5 – 1,0	CuZn	blank	0,8	16	6	0,35	10.000
	24.810.121		CuZn	Sn					
	24.810.311		CuSn	blank					
	24.810.321		CuSn	Sn					
	24.825.111.005	1,0 – 2,5	CuZn	blank	0,5	16	6	0,35	10.000
	24.825.121.005		CuZn	Sn					
	24.825.311.005		CuSn	blank					
	24.825.321.005		CuSn	Sn					
	24.825.111	1,0 – 2,5	CuZn	blank	0,8	16	6	0,35	10.000
	24.825.121		CuZn	Sn					
	24.825.311		CuSn	blank					
	24.825.321		CuSn	Sn					