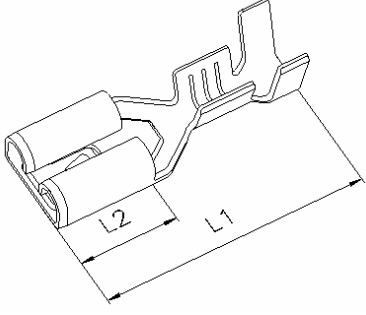



HS United European Connectors

Flachsteckhülse 4,8 mm leicht steckbar	Artikel-Nr.	Leiter- quer- schnitt	Material	Ober- fläche	Steck- dicke	L1	L2	Mate- rial- stärke	Verp.- Ein- heit	
		mm ²			mm	mm	mm	mm		
 <p>Längstransport</p>	74.810.115.001	0,5 – 1,0	CuZn	blank	0,5	16	6	0,3	12.000	
	74.810.125.001		CuZn	Sn						
	74.810.315.001		CuSn	blank						
	74.810.325.001		CuSn	Sn						
	74.810.110.001	0,5 – 1,0	CuZn	blank	0,8	16	6	0,3	12.000	
	74.810.120.001		CuZn	Sn						
	74.810.310.001		CuSn	blank						
	74.810.320.001		CuSn	Sn						
	74.820.110	2 x 0,75	CuZn	blank	0,8	16	6	0,3	10.000	
	74.820.120		CuZn	Sn						
	74.820.310		CuSn	blank						
	74.820.320		CuSn	Sn						
	74.825.115	1,0 – 2,5	CuZn	blank	0,5	16	6	0,3	10.000	
	74.825.125		CuZn	Sn						
	74.825.315		CuSn	blank						
	74.825.325		CuSn	Sn						
74.825.110	1,0 – 2,5	CuZn	blank	0,8	16	6	0,3	10.000		
74.825.120		CuZn	Sn							
74.825.310		CuSn	blank							
74.825.320		CuSn	Sn							
Flachsteckhülse 4,8 mm leicht steckbar Parallelcrimp	Artikel-Nr.	Leiter- quer- schnitt	Material	Ober- fläche	Steck- dicke	L1	L2	Mate- rial- stärke	Verp.- Ein- heit	
		mm ²			mm	mm	mm	mm		
	 <p>Längstransport</p>	74.826.115	1,5 – 2,5	CuZn	blank	0,5	16	6	0,3	10.000
		74.826.125		CuZn	Sn					
		74.826.315		CuSn	blank					
		74.826.325		CuSn	Sn					
		74.826.110	1,5 – 2,5	CuZn	blank	0,8	16	6	0,3	10.000
		74.826.120		CuZn	Sn					
74.826.310		CuSn		blank						
74.826.320		CuSn		Sn						